



AL2408

Al Profile: 24mmW*08mmH

Slim Aluminium profile (Recessed) for linear LED lighting.

Al Extrusion

- AL 6063-T5 grade
- Anodized, Oxide layer 8-10µm
- Silver finish
- Recessed (**Cutout** :18mmW*10mmH)
- 2m continuous length (Customizable)

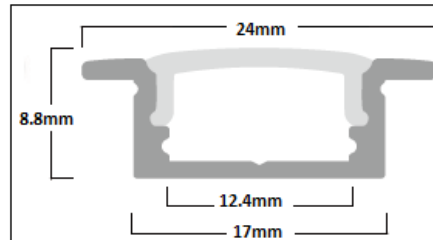


Diffused Cover

- Polycarbonate (PC) Opal diffuser
- >80% Light transmittance
- Smooth surface
- 2m continuous length (Customizable)



Accessories

- End caps : Polycarbonate, Gray finish
- Mounting clips : SS301 (2clips/m)



LED Strip Light options (for non-dotting & uniform light output)

- SL10MD (10W/m)
- SL15MD (15W/m)
- SL21MD (21W/m)

CRI
90+

CCT
3K/4K

IP
20/67

Control
Non-Dim/1-10V/DALI