

DL1002RT

Downlight: 11W/15W 38°/60° IP44 Fixed Recessed Type

For high illumination & glare control applications. Elegant design to maintain space aesthetics. Quick heat dissipation through unique heat sink.

Light Source

- **CREE-CXA/OSRAM** COB
- CRI 80/90
- 3 Step MacAdam or less
- Life expectancy @10,080hrs 55°C 375mA
Reported TM-21 L70: >60,500hrs

LED Driver

- **Tridonic** Constant Current
- THD<15% PF 0.95 Eff. 90% at Full Load
- O/L, S/C, O/V, O/T Protection
- Life expectancy: up to 50,000hrs

Body

- Die-cast Aluminium body & Heat sink
- Powder coated: Matt Black/White

Reflector & Diffuser Cover

- PC Reflector with Al Plating
- Semi frosted PMMA diffuser
90% Efficiency at 36°/60°




Luminaire Details


- System Power **11W / 15W**
- Beam Angle : 38°/60°
- **IP44 [Fixed Type]**
- Dimming Controls:
Non Dim / Phase / 1-10V / DALI / CASAMBI

Luminaire Luminous Flux

1016lm at 11W-3K-60°-CRI80 [90lm/W]

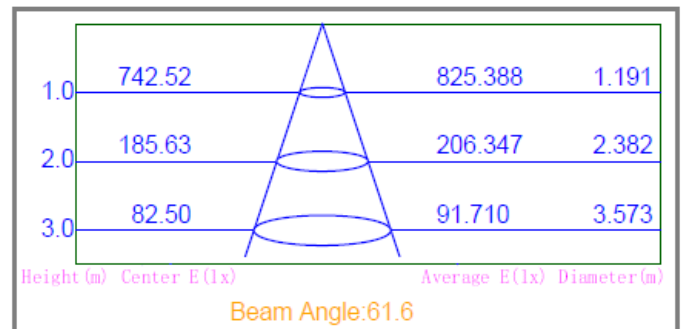

Dimensions:

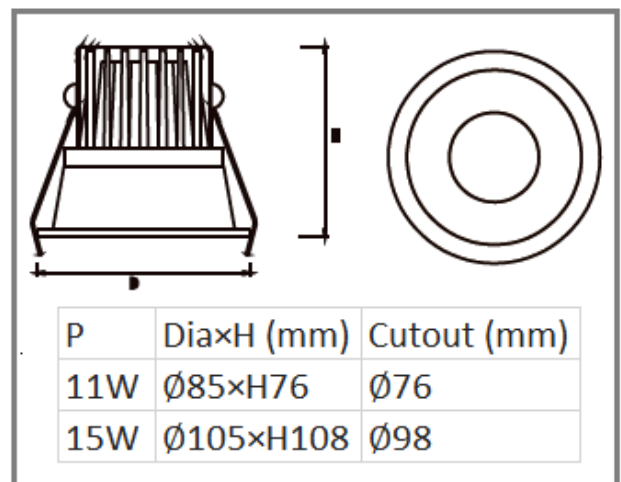

Responsibly Sourced Product

- High lm/W for great lighting outcome & compliance with Standards & BCA J-6

Order code: DL1002RT-W[11/15]-CT[3K/4K]-Beam[36°/60°]-CRI[80/90]-Color Finish [Black/White]-Control[Non Dim/Phase/1-10V/DALI]
For example: [DL1002RT-11W-3K-60-80-BK-PH]