

## DL1004RT

### Downlight: 11W/15W 38°/60° IP20 Adjustable Recessed Type

For high illumination & glare control applications. Elegant design to maintain space aesthetics. Quick heat dissipation through unique heat sink.

#### Light Source

- CREE-CXA/OSRAM COB
- CRI 80/90
- 3 Step MacAdam or less
- Life expectancy : @10,080hrs 55°C 577mA  
Reported TM-21 L70 >60,500hrs

#### LED Driver

- Tridonic Constant Current
- THD<15% PF 0.95 Eff. 90% at Full Load
- O/L, S/C, O/V, O/T Protection
- Life expectancy: up to 50,000hrs

#### Body

- Die-cast Aluminium body & Heat sink
- Powder coated: Matt Black/White

#### Reflector & Diffuser Cover

- PMMA [Semi Frosted]




#### Luminaire Details


- System Power **11W / 15W**
- Beam Angle : 38° / 60°
- **IP20 [Adjustable Type]**
- Dimming Controls:  
Non Dim / Phase / 1-10V / DALI / CASAMBI

#### Luminaire Luminous Flux

1442lm at 15W-3K-CRI80-RO [86lm/W]

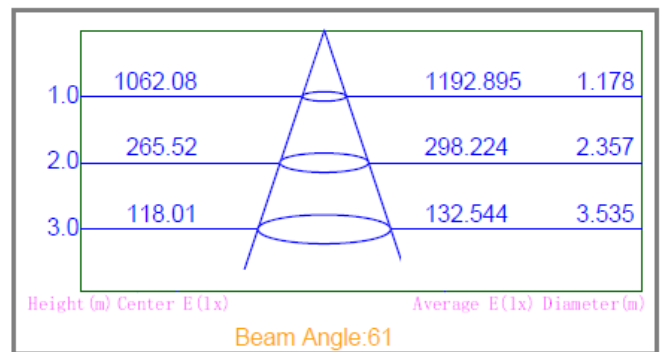

#### Dimensions:

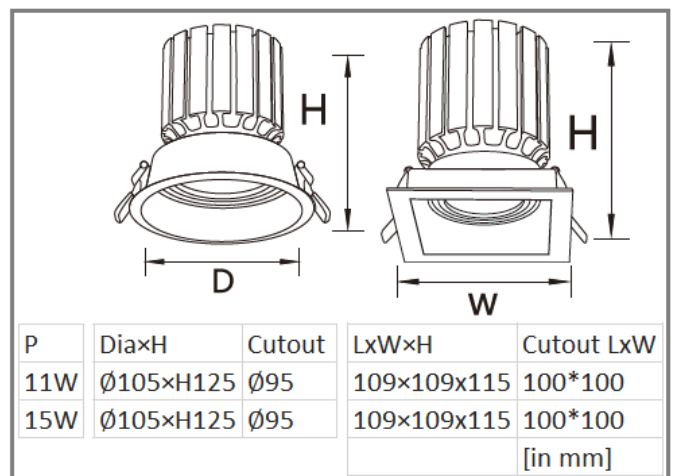

#### Responsibly Sourced Product

- High lm/W for great lighting outcome & compliance with Standards & BCA J-6

**Order code:** DL1004RT-**W**[11/15]-**CT**[3K/4K]-**Beam**[38/60°]-**CRI**[80/90]-**Color Finish**  
[Black/White]-**Control**[Non Dim/Phase/1-10V/DALI]  
**For example:** [DL1004RT-11W-3K-60-80-BK-DA]

(Information above is best known at publication & subject to change with improvements)

(+61) 451 916 586 | [info@mydlight.com.au](mailto:info@mydlight.com.au) | [www.mydlight.com.au](http://www.mydlight.com.au)