

DL1005RT

Downlight: 15W 100° beam IP65 Fixed Recessed Type

For uniform & widespread lighting to open up a space. Suitable for indoor and outdoor applications. Quick heat dissipation through unique heat sink.

Light Source

- **OSRAM** 2835 SMDs
- CRI 80/90
- 3 Step MacAdam or less
- Life expectancy 9,000hrs 55°C 100mA
Reported TM-21 L70: >54,000hrs

LED Driver

- **Tridonic** Constant Current
- THD<15% PF 0.95 Eff. 90% at Full Load
- O/L, S/C, O/V, O/T Protection
- Life expectancy: up to 50,000hrs

Body

- Die-cast Aluminium body & Heat sink
- Powder coated: Matt Black/White

Reflector & Diffuser Cover

- PMMA Opal diffuser




Luminaire Details


- System Power : **15W**
- Beam Angle : 100°
- **IP65 [Fixed Type]**
- Dimming Controls:
Non Dim / Phase / 1-10V / DALI / CASAMBI

Luminaire Luminous Flux

1405lm at 15W-3K-CRI80 [98lm/W]

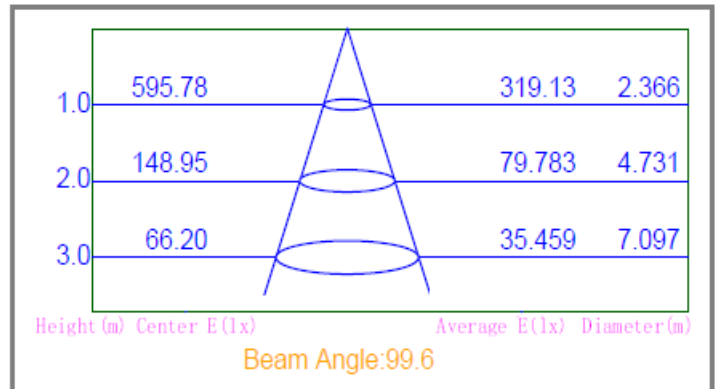

Dimensions:

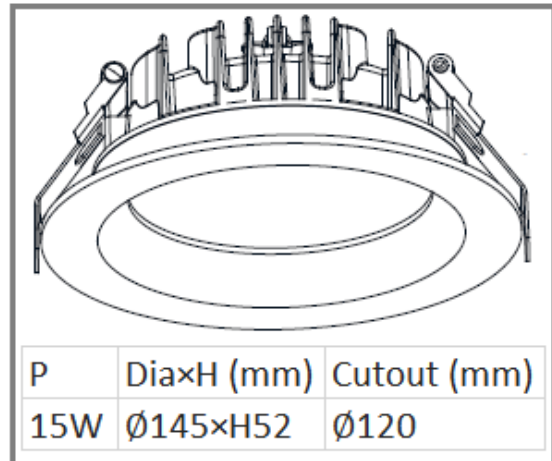

Responsibly Sourced Product

- High lm/W for great lighting outcome & compliance with Standards & BCA J-6

Order code: DL1005RT-**W**[15]-**CT**[3K/4K]-**CRI**[80/90]-**Color Finish**[Black/White]-
Control[Non Dim/Phase/1-10V/DALI]
For example: [DL1005RT-15W-3K-80-BK-PH]

(Information above is best known at publication & subject to change with improvements)

(+61) 451 916 586 | info@mydlight.com.au | www.mydlight.com.au