



AL2525

Al Profile: 25mmW*25mmH

Aluminium profile for linear LED lighting.

Al Extrusion

- AL 6063-T5 grade
- Anodized, Oxide layer 8-10µm
- **Black/Silver finish**
- Surface/Suspension mounting
- 2m continuous length (Customizable)

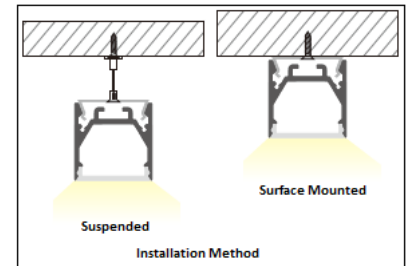


Diffused Cover

- Polycarbonate (PC) Opal diffuser
- >80% Light transmittance
- Smooth surface
- 2m continuous length (Customizable)



Accessories

- End Caps: Polycarbonate, **Black/Gray finish**
- Surface Mounting: 2 SS301 clips/m
- Suspended : 2*1m SS wire suspension kit/m, Ceiling plate with cable connector.



LED Strip Light options (for non-dotting & uniform light output)

- SL10MD (10W/m)
- SL15MD (15W/m)
- SL21MD (21W/m)

CRI
90+

CCT
3K/4K

IP
20/67

Control
Non-Dim/1-10V/DALI