

DL1004RT

Downlight: 11W/15W 38°/60° IP20 Adjustable Recessed Type

For high illumination & glare control applications. Elegant design to maintain space aesthetics. Quick heat dissipation through unique heat sink.

Light Source

- **CREE-CXA/OSRAM** COB
- CRI 80/90
- 3 Step MacAdam or less
- Life expectancy : @10,080hrs 55°C 577mA
Reported TM-21 L70 >60,500hrs

LED Driver

- **Tridonic** Constant Current
- THD<15% PF 0.95 Eff. 90% at Full Load
- O/L, S/C, O/V, O/T Protection
- Life expectancy: up to 50,000hrs

Body

- Die-cast Aluminium body & Heat sink
- Powder coated: Matt Black/White

Reflector & Diffuser Cover

- PMMA [Semi Frosted]




Luminaire Details


- System Power **11W / 15W**
- Beam Angle : 38° / 60°
- **IP20 [Adjustable Type]**
- Dimming Controls:
Non Dim / Phase / 1-10V / DALI / CASAMBI

Luminaire Luminous Flux

1442lm at 15W-3K-CRI80-RO [86lm/W]

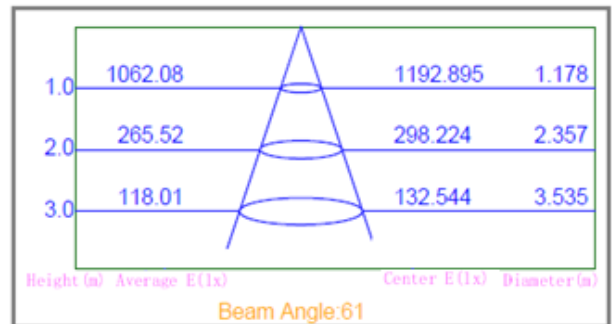

Dimensions:

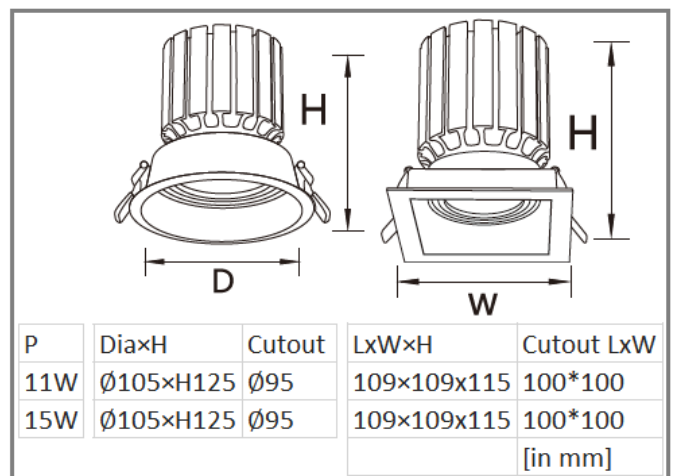

Responsibly Sourced Product

- High lm/W for great lighting outcome & compliance with Standards & BCA J-6

Order code: DL1004RT-**W**[11/15]-**CT**[3K/4K]-**Beam**[38/60°]-**CRI**[80/90]-**Color Finish**
[Black/White]-**Size**[Round/Square]-**Control**[Non Dim/Phase/1-10V/DALI]
For example: [DL1004RT-11W-3K-60-80-BK-RO-DA]

(Information above is best known at publication & subject to change with improvements)

(+61) 451 916 586 | info@mydlight.com.au | www.mydlight.com.au