

DL2001ST

Downlight: 11W/15W 40° IP65 Fixed Surface Mounted Type

For high illumination & glare control applications. Slim Cylindrical. Elegant design to maintain aesthetics of your space.

Light Source

- **CREE-CXA/OSRAM** COB
- CRI 80/90
- 3 Step MacAdam or less
- Life expectancy @10,050hrs 55°C 577mA
Reported TM-21 L70: >60,500hrs

LED Driver

- **Tridonic/Boke** Constant Current [in built]
- THD<15% PF 0.95 Eff. 90% at Full Load
- O/L, S/C, O/V, O/T Protection
- Life expectancy: up to 50,000hrs

Body

- Die-cast Aluminium & Heat sink
- Powder coated: Matt Black/White
- Anodized baffle : Black/White

Reflector & Diffuser Cover

- PMMA [Semi Frosted]




Luminaire Details


- System Power **11W / 15W**
- Beam Angle : 40°
- **IP65 [Fixed Type]**
- Dimming Control:
Non Dim Phase 1-10V DALI

Luminaire Luminous Flux

1310lm at 15W-3K-CRI80 [93lm/W]

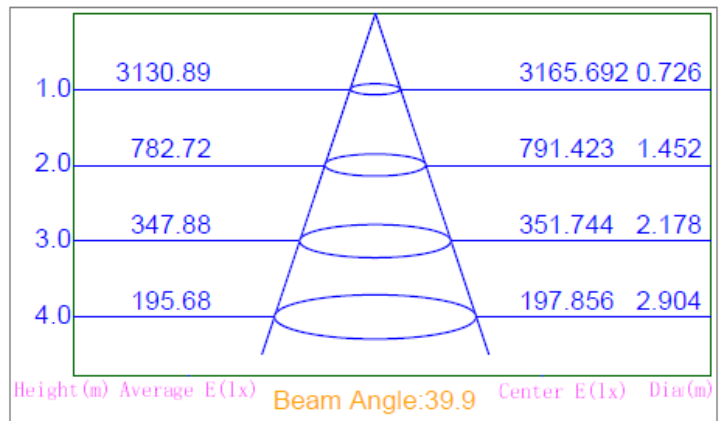

Dimensions:

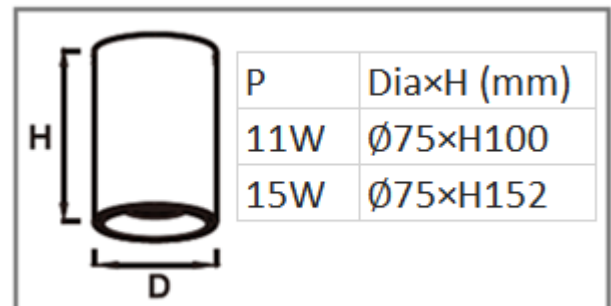

Responsibly Sourced Product

- High lm/W for great lighting outcome & compliance with Standards & BCA J-6

Note: Higher wattage, larger dimension & suspension options are available.

Order code: DL2001ST-**W**[11/15]-**CT**[3K/4K]-**CRI**[80/90]-**Color Finish**[Black/White]-
Control[ND/Phase/1-10V/DALI]
For example: [DL2001ST-11W-3K-80-BK-ND]