DL1000RT

Downlight: 3W 24° IP44 Fixed Recessed Type

For night light application. Miniature spotlight. Elegant design.

Light Source

- OSRAM 2835 SMD
- CRI 80
- 3 Step MacAdam or less

LED Driver

- Boke/Eaglerise Constant Current
- THD<15% PF 0.90 Eff. >68% at Full Load
- O/L, S/C, O/V, O/T Protection
- Life expectancy: up to 50,000hrs

Body

- Die-cast Aluminium body & Heat sink
- Powder coated: Matt Black/White
- Baffle Finish : Black/White/Graphite

Reflector & Diffuser Cover

PMMA [Semi Frosted]




Luminaire Details


- System Power **3W**
- Beam Angle: 24°
- IP44 [Fixed]
- Dimming Controls:
 Non Dim

Luminaire Luminous Flux

222lm at 3W-3K [73lm/W]

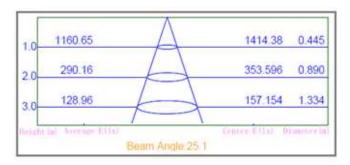

Dimensions:



Responsibly Sourced Product

High lm/W for great lighting outcome
 & compliance with Standards & BCA J-6

Order code: DL1000RT-W[3]-CT[3K/4K]-Color Finish[Black/White]-Baffle Finish

[Black/White/Graphite]

For example: [DL1000RT-3W-3K-WH-GR]

