

DL1001RT

Downlight: 3W 24° IP20 Adjustable Recessed Type

For night light application. Miniature spotlight. Elegant design.

Light Source

- **OSRAM** 2835 SMD
- CRI 80
- 3 Step MacAdam or less

LED Driver

- **Boke/Eaglerise** Constant Current
- THD<15% PF 0.90 Eff. >68% at Full Load
- O/L, S/C, O/V, O/T Protection
- Life expectancy: up to 50,000hrs

Body

- Die-cast Aluminium body & Heat sink
- Powder coated: Matt Black/White
- Baffle Finish : Black/White/Graphite

Reflector & Diffuser Cover

- PMMA [Semi Frosted]




Luminaire Details

- System Power **3W**
- Beam Angle : 24°
- **IP20 [Adjustable]**
- Dimming Controls:
Non Dim

Luminaire Luminous Flux

222lm at 3W-3K [73lm/W]

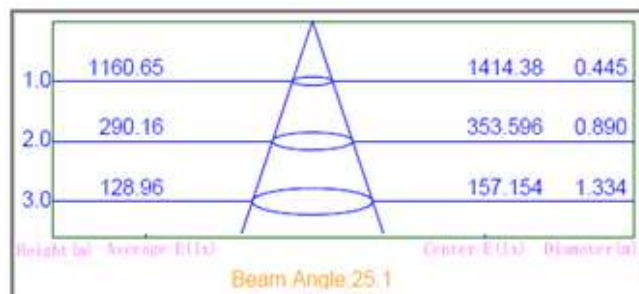

Dimensions:



Responsibly Sourced Product

- High lm/W for great lighting outcome & compliance with Standards & BCA J-6

Order code: DL1001RT-**W**[3]-**CT**[3K/4K]-**Color Finish**[Black/White]-Baffle Finish
[Black/White/Graphite]
For example: [DL1001RT-3W-3K-WH-GR]

(Information above is best known at publication & subject to change with improvements)

(+61) 451 916 586 | info@mydlight.com.au | www.mydlight.com.au